


条形照明

MBRL 系列




- 以阵列的方式来排列高强度 LED。
- 无论是直接明场照明还是倾斜暗场照明都能以任何角度照射到物体表面。

型号代码说明

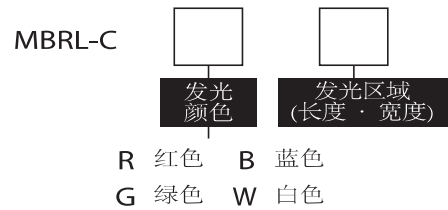


型号	发光颜色	最大额定电流 IFM(A)	发光区域尺寸(mm)	重量 (g)
★ MBRL-CR3408	● 红色	0.09	34×8.4	35
★ MBRL-CG3408	● 绿色	0.17	34×8.4	
★ MBRL-CB3408	● 蓝色	0.17	34×8.4	
★ MBRL-CW3408	○ 白色	0.17	34×8.4	
MBRL-CR5015	● 红色	0.13	50×15	50
★ MBRL-CG5015	● 绿色	0.26	50×15	
MBRL-CB5015	● 蓝色	0.26	50×15	
MBRL-CW5015	○ 白色	0.26	50×15	
MBRL-CR7530	● 红色	0.36	75×30	120
★ MBRL-CG7530	● 绿色	0.52	75×30	
MBRL-CB7530	● 蓝色	0.52	75×30	
MBRL-CW7530	○ 白色	0.52	75×30	
MBRL-CR13015	● 红色	0.32	130×15	85
★ MBRL-CG13015	● 绿色	0.53	130×15	
MBRL-CB13015	● 蓝色	0.53	130×15	
MBRL-CW13015	○ 白色	0.53	130×15	
★ MBRL-CR24015	● 红色	0.60	240×15	270
★ MBRL-CG24015	● 绿色	0.80	240×15	
★ MBRL-CB24015	● 蓝色	0.80	240×15	
★ MBRL-CW24015	○ 白色	0.80	240×15	
★ MBRL-CR36015	● 红色	0.80	360×15	380
★ MBRL-CG36015	● 绿色	1.09	360×15	
★ MBRL-CB36015	● 蓝色	1.09	360×15	
★ MBRL-CW36015	○ 白色	1.09	360×15	
★ MBRL-CR48015	● 红色	1.06	480×15	480
★ MBRL-CG48015	● 绿色	1.32	480×15	
★ MBRL-CB48015	● 蓝色	1.32	480×15	
★ MBRL-CW48015	○ 白色	1.32	480×15	

照明结构

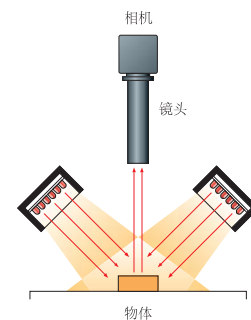

示例影像

MBRL-CW7530 与 MDF-BR7530



晶圆文字


MBRL-CR7530




剃刀边缘

★定制产品


MBRL-CR (CG,CB,CW) 3408

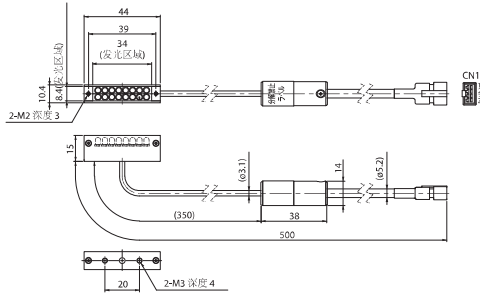


MBRL-CR (CG,CB,CW) 5015




MBRL-CR (CG,CB,CW) 7530

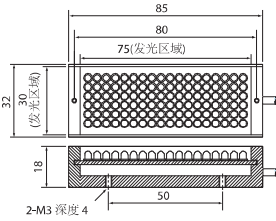


MBRL-CR (CG,CB,CW) 13015

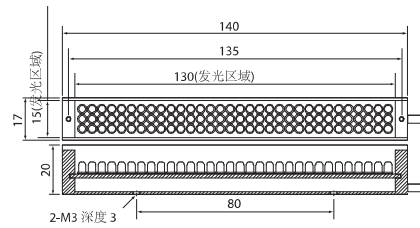


MBRL-CR (CG,CB,CW) 24015

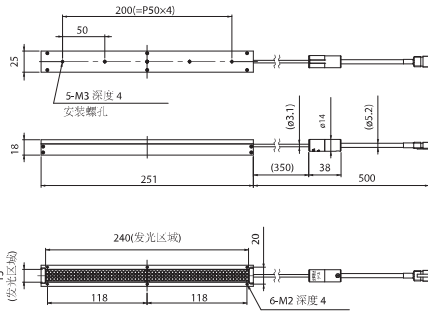

MBRL-CR (CG,CB,CW) 36015

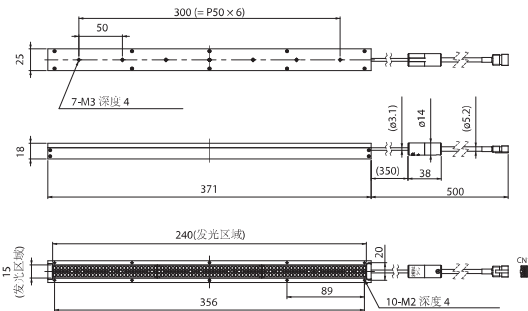


MBRL-CR (CG,CB,CW) 48015

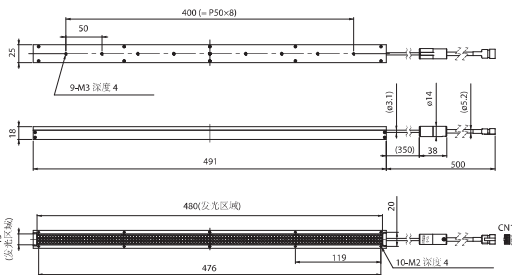

光分布特征

MBRL-CW7530

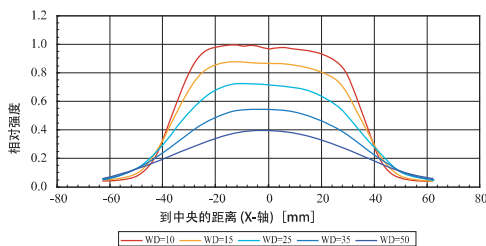

MBRL-CW24015

